01932 570001
www.broadcast-services.co.uk
Broadcast Video
Equipment
Hire
broadcast
SERVICES

4LONG 6LIGHT

User´s Manual

THELIGHT

THELIGHT Luminary for cine and TV, S.L.

INTRODUCTION

This guide provides information about how to use the product functions to illuminate with this equipment as well as warnings on his use.
The 6LIGHT and 4LONG are products of professional use for interior locations or studio and must be operated only by qualified technical personnel.
To obtain the maximum features, please read the following operating instructions very carefully before using this fixture for the first time. Please keep these operating instructions for you and subsequent users to reference in the future.

THELIGHT Luminary for cine and TV, S.L.

Safety Precautions	For your own safety, please read and follow all safety instructions and warnings.
Exemption from Liability	THELIGHT Luminary for cinema and TV, S.L. does not assume any responsibility for lighting failures caused by malfunction of this product. The manufacturer disclaims liability for any damage to persons or property caused by inappropriate operation, damage of this kind lies in the responsibility of the operator.
Warranty	This product is manufactured to local specifications and the warranty is valid within the country of purchase. Should the product fail or malfunction while you are abroad, the manufacturer assumes no responsibility for servicing the product locally or bearing the expenditure incurred thereof.

www.thelight.com.es

The total or partial reproduction of this guide is prohibited without the express written permission of THELIGHT.
THELIGHT technology is protected under Spanish license laws with international patents pending.
Information and specifications in this document are subject to change without notice.
2011 © Copyright THELIGHT. All rights reserved.

SAFETY PRECAUTIONS

Various symbols are used throughout this instruction manual and on the product to prevent physical harm to you or other people and damage to property.
The symbols and their meanings are explained below.

	Warning	Possible risk of injury or damage to equipment
	Danger	This symbol indicates the risk of electric shock or fire danger that could result in injury or damage to equipment.

This equipment has been checked and meets the requirements of general safety for electronic devices. These requirements are specified to provide a reasonable protection against electromagnetic interferences when the equipment is used in commercial environments.

This equipment generates, uses and can emit waves of radio frequency, and if not properly used following the instructions of this manual can produce interferences in radio communications. The use of this equipment in residential areas can produce interferences, the user will be the only responsible of correcting them.

CAUTION: Though the light generated by LED does not produce any heat, for what his use turns out to be very comfortable for the actors, the lamp head acts as a heat sink through its back part.
Surface can reach a temperature between the 50 ºC and the 80 ºC. Please use protective gloves if you touch the lamp head at the heat sink.

	Danger	Do not attempt to open any of the device or component housings. To reduce the risk of electric shock, do not remove lamp head or Control Unit cover. No user-serviceable parts inside. Maintenance and repair work to be carried out only by THELIGHT Service Center. Do not cover the aluminium lamp head heat sink while using it. Proper ventilation must be provided. Avoid exposing the lamp head to the heat radiation of other light fixtures. The lamp head is equipped with high power LEDs. Due to their high light-output intensity don't stare directly into the light source.

	Warning	In order to protect against risk of electric shock, the installation should be properly grounded. Defeating the purpose of the grounding type plug will expose you to the risk of electric shock.

Marking

CE

TABLE OF CONTENTS

Introduction 3
Safety precautions 4
Table of contents 5
1. **Main features** 6
2. **Components and accessories** 7
3. **Names and parts** 9
   6LIGHT lamp head 9
   4LONG lamp head 9
   VAC Control Unit 10
4. **Placing into operation** 11
   Quick link swivel ball head mounting 11
   Removing the Quick link swivel ball head mounting 11
   Connecting the power cable to the VAC Control Unit 12
   Connecting VDC Control Unit and lamp head through the extension cable 12
   Disconnecting the extension cable 12
   Placing the VDC Control Unit in the stand mast 13
   Securty cables 13
5. **Digital Adjustments** 14
   Turning the power On/Off 14
   COLOR TEMPERATURE 14
   TURBO 14
   DIMMER 15
   -/+ GREEN 15
6. **DMX 512 Control** 16
7. **Mechanical Adjustments** 17
   Beam angle variation 17
   Barn doors installation 17
   Quick link diffuser installation 18
8. **Specifications** 19
   6LIGHT 19
   4LONG 20
   Control Unit 20
Chromaticity coordinates diagram 21
Photometrics 22
Regulations 24
Warranty 25

1. MAIN FEATURES

6LIGHT / 4LONG are LED panel shousing a total of 144 high power LED (6LIGHT) / 196 high power LED (4LONG). They have been specially designed and their colorimetry calibrated for professional photography, cinematography and television industry use.
THELIGHT luminaries main innovative features are:

- Variable Colour Temperature
- Stable colour dimming
- Green/magenta bias control
- Very high light output
- Low power draw
- High CRI digitally calibrated light
- Lightweight lamp head

NOTE ABOUT MEASURING COLOUR TEMPERATURE (CCT)

6LIGHT / 4LONG incorporate the innovative THELIGHT technology based on high power LED triplets Warm White + White + Green + fresnel lens + CPU control software to obtain the wide range of calibrated colour temperatures combined with a high colour rendering index CCT.

We must remark that colour meters in use today are designed for a full spectrum source such as incandescent lights and therefore cannot be used to accurately read the correlated colour temperature (CCT) of the light emitted by THELIGHT and other LED light fixtures.

The eventual diversions to green display as CC10M or CC15M in hand-held colour meters are due to these unaccuracy on reading of the light emitted by LED and must not be considered.

THELIGHT guarantees pure white light and correct colorimetry of the light delivered by its high power LED luminaries which have been calibrated in laboratory according to CIE 13.3-1995 international standards for measurement of the CRI and chromatic coordinates (x, and CIE-1931).
The reliability of this digital equipment is supported by the calibration THELIGHT has made in laboratory by spectrophotometer, which precision is half-yearly calibrated according to the National Institute of Standards (NIST) of the United States and of the Physikalisch-Technische Bundesanstalt (PTB) of Germany.
In order that the advanced THELIGHT luminaries could be used together with other light sources, THELIGHT has accurately calibrated both the CCT and the chromatic coordinates to match them with traditional light sources following tungsten and daylight standards.

The digital Control Unit allows a further and precise green/magenta correction along the whole scale of colour temperatures.

2. COMPONENTS AND ACCESSORIES

Each THELIGHT kit is composed by:

1 x 6LIGHT / 4LONG lamp head

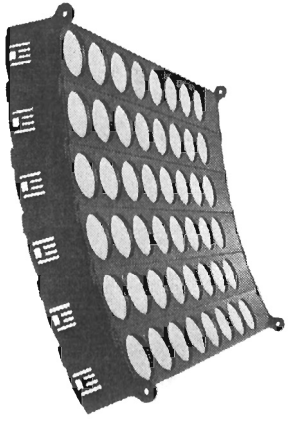

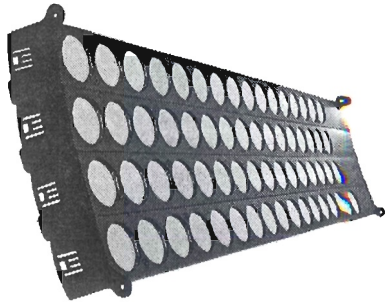

1 x VAC Control Unit

1 x Quick link swivel-ball head with 3/8" pin

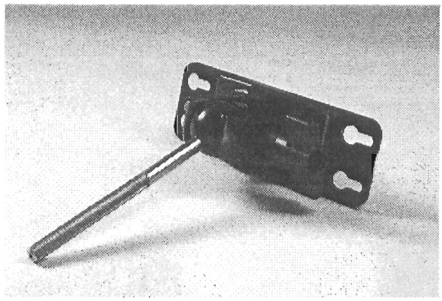

2 x 6LIGHT / 4LONG Removable barn doors



1 x 2,5 meters power cable



1 x 2,5 meters extension cable

1 x Hexagonal 5/8" (16mm) baby spud



1 x Quick link diffusser



3. NAMES AND PARTS

6LIGHT lamp head

Rear view

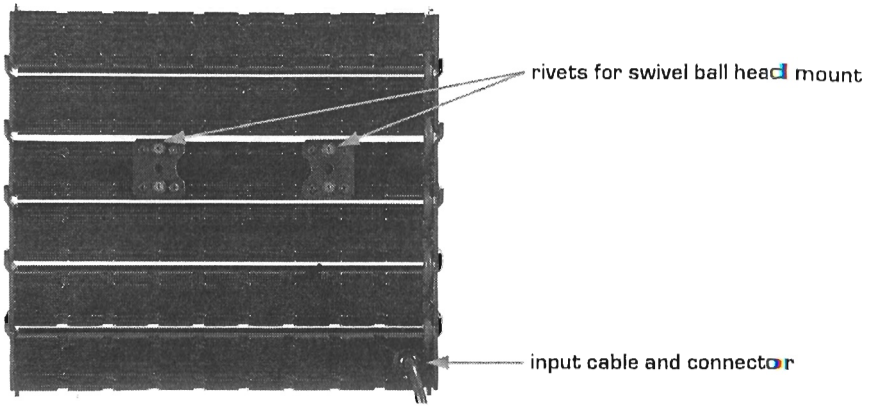

4LONG lamp head

Rear view

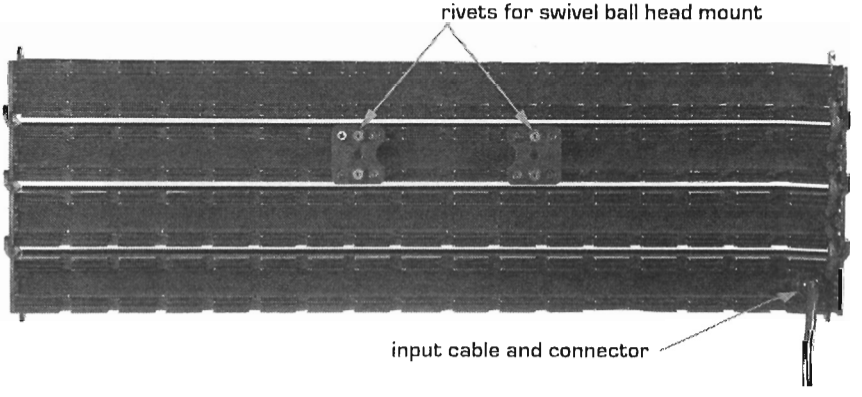

VAC Control Unit

Front view

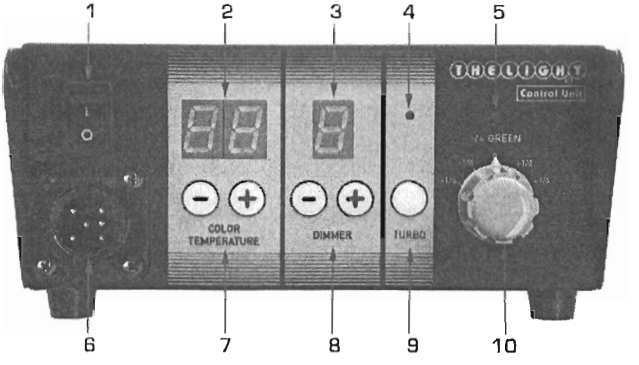

1 Power switch
2 Colour temperature digital display
3 Intensity level digital display
4 Turbo status blue LED
5 Green/magenta offset status green LED
6 Power output
7 Colour temperature adjustment buttons
8 Intensity adjustment buttons
9 On/off turbo button
10 Green/magenta knob

Rear view

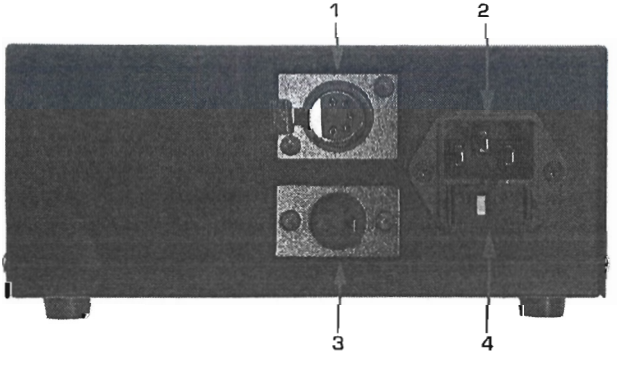

1. XLR DMX input
2. Mains power input
3. XLR DMX out
4. Fuse receptacle (2 x 2,5A)

4. PLACING INTO OPERATION

1. Quick link swivel ball head mounting

Align the swivel ball head plate to the four rivets located at the back of the lamp head as shown in the picture.

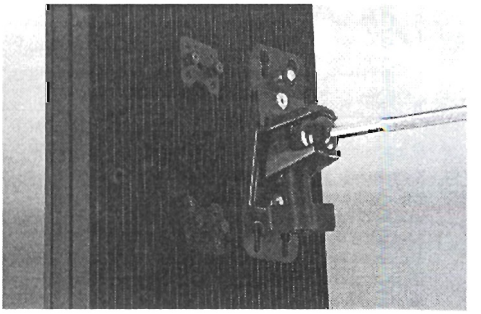

Warning On mounting the lamp head on any type of support, tripod or ceiling grid make sure the swivel ball head handle is facing down towards the ground.

Slide the swivel ball head plate until the four shoulder rivets drop into the receptacle. The locking pin will snap into place when the plate is properly seated.

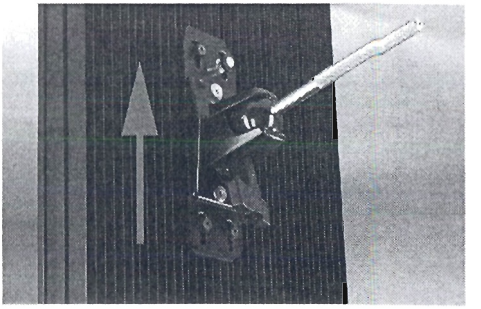

Warning Make sure the locking pin has totally entered in his housing before proceeding to use the light fixture.

The standard swivel ball head comes with a 3/8" pin to be clamped into a grip head and allows the lamp head to be oriented and locked in a broad range of angles.

Removing the quick link swivel ball head

Pull up on the locking pin and slide the swivel ball head plate until the four rivets get free. Extract the swivel ball head by pulling it upwards.

2. Connecting the power cable to the VAC Control Unit

Connect the power cable to the plug located in the rear side of the VDC Control Unit. Connect the power plug with a mains power outlet.

	Danger	To avoid electric shocks and/or damages in the equipment the power switch located at the VAC Control Unit front panel must be off before connecting or disconnecting cables.

3. Connecting VAC Control Unit and lamp head through the extension cable

Connect the connector in the circular receptacle at the VAC Control Unit front panel.
Verify the correct alignment of the connectors before inserting them.
Rotate the locking ring until it clicks into the lock position.

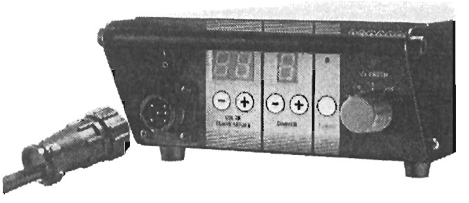

Connect the same way the other end of the extension cable in the input receptacle coming out from the lamp head.



Disconnecting the extension cable

Grab the connector firmly, turn the ring to unlock it and pull to extract it.

NOTE:	The extension cable is provided with two equal connectors in every end: both can be connected either in the VAC Control Unit or in the lamp head.

NOTE:	THELIGHT VAC Control Unit has been designed to supply power to both the 6LIGHT and the 4LONG lamp heads. With either of these connected the light emitted will always be correct.

4. Placing the VAC Control Unit in the stand mast

You can place the VAC Control Unit in the stand mast for a handy use close to the lamp head. To do so you will need to use a regular Manfrotto or Avenger Super Clamp (not included in the 4LIGHT kit) and insert the Hexagonal 5/8" (16mm) baby spud.

Once installed the hexagonal spud just slide the holder located at the VAC Control Unit bottom over the spud plate until properly seated, as shown in the picture.

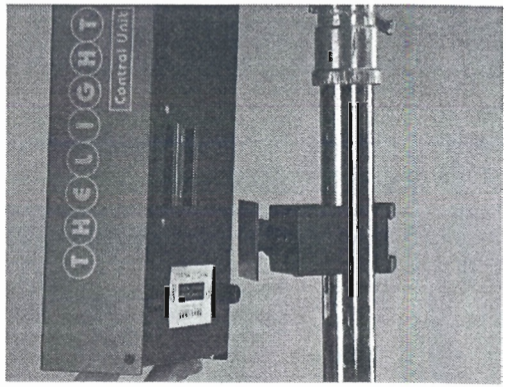

5. Security cables

The lamp head is provided with several holes specially design to insert one o more 5mm snaps and their safety cable.

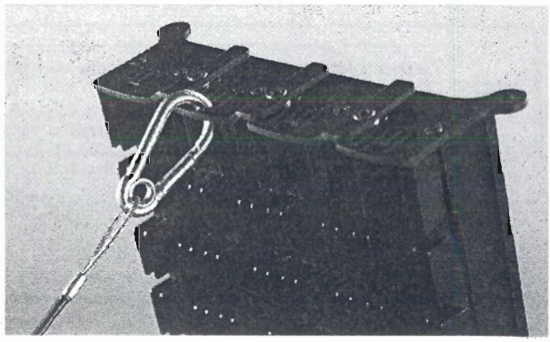

Warning	When the lamp head and any other component is mounted in a hanging position it must be secured with a safety cable rated at a minimum of ten times the weight of the light fixture including its accessories.

5. DIGITAL ADJUSTMENTS

The VAC Control Unit doubles as power supply and digital remote controller of the following light parameters through its programmed CPU:

- Calibrated Colour Temperature variation
- Stable colour dimming
- Green/magenta bias control

Turning the Power On/Off

Turn on the equipment by switching the power button towards the I position. Switch the power button towards O position to turn it off.
The light settings always remain stored when the VAC Control Unit is powered off.

Danger Both the lamp head and the VAC Control Unit are electrically protected against power failures but to avoid possible electric shocks and/or equipment damages make sure the power switch located at the VAC Control Unit front panel will be off before connecting or disconnecting cables.
In case of extreme over tension replace the 5mm 2,5Ah fuses from inside the fuseholder located at VAC Control Unit back. (see picture on page 9)

NOTE: If a power failure would happen or the cables would be accidentally disconnected the VAC Control Unit would entry on Error mode and the number 8 would show in the digital display.
To reset the equipment and resume the light values turn the switch power off, connect the cables and switch on the power button.

COLOR TEMPERATURE Variation

Colour temperature can be easily increased or reduced through the +/- buttons located at the VAC Control Unit front panel. Above them a digital display indicates at all times the selected colour temperature. The value 3.2 corresponds to 3200K and the value 3.3 to 3300K and so on.
Push the + button to increase colour temperature or push the - button to decrease it. If you keep pushed any of the buttons the you will get a continuous variation.

NOTE: Every push on the buttons will increase or decrease the colour temperature in calibrated increments of 100 Kelvin.

TURBO

By activating the TURBO button (a blue LED lights up on the screen of the Control Unit) maximum light output is achieved in the colour temperature selected and the value 9 will appear on the dimmer display.

DIMMER Light intensity variation

The dimmer of the VAC Control Unit is totally digital and guarantees the regulation of light intensity without producing changes in the selected colour temperature.

Light intensity can be easily increased or reduced through the +/- buttons located at the VAC Control Unit front panel. Above them a digital display indicates at all times the selected dimmer value from a minimum of 1 to a maximum of 9.
Push the + button to increase colour temperature or push the – button to decrease it. If you keep pushed any of the buttons the you will get a continuous variation.

NOTE:	Every push on the buttons will increase or decrease the colour temperature in calibrated increments of ½ stop.

-/+ GREEN Green/magenta bias control

Green/magenta bias switch located at the VAC Control Unit front panel lets you easily alter the colour of the light emitting at any colour temperature towards green or magenta in increments of -/+ 1/8 and ¼.
When this switch is not in the standard position a green LED light turns on in the VAC Control Unit to warn that the light emitted no longer guarantees the correct chromaticity.

NOTE:	THELIGHT guarantees the correct colorimetry for light emitting from their high power LED light fixtures, calibrated in the laboratory according to current international standards of the CIE 13.3-1995 for the average CRI and the chromatic co-ordinates (x, y CIE-1931). This certifies that our luminaries have no green/magenta deviation.

6. DMX 512 CONTROL

THELIGHT mains power lightning fixtures have been designed for a full DMX control from the 5-pin DMX port on the back of the VAC Control Unit.
Connect the DMX cable coming from your console into the DMX IN male connector located at the back fo the VAC Control Unit. Beside the DMX IN there is also a DMX OUT connector to daisy-chain fixtures.

Adressing channels

Push both + and - COLOR TEMPERATURE buttons at the same time and then switch on the power button. Wait a few seconds for the three digital displays to blink.
Now you can define the start address. To do so just push the + or – DIMMER buttons to increase or decrease the first fixture address. Once you have chosen the desired address number push the TURBO button to save the selection.
Keep in mind the following points regarding DMX control:

- THELIGHT DMX protocol uses 5 channels per fixture
- The first fixture to be controlled should be set to DMX address 001 and it will automatically use the following four channels.
- If you wish to control several THELIGHT fixtures at the same values you will have to set them to the same address.
- If you wish to control several THELIGHT fixtures independently you will have to offset their address by 5 channels. Example:

fixture1 address 001 – fixture2 address 006 – fixture3 address 011

DMX Modes

When you connect your console to the VAC Control Unit you will have to control modes over THELIGHT fixtures through 5 channels.

Channel 1 (start address) defines control mode:

1. **THELIGHT Mode** (channel 1 fader at 0%)
   The VAC Control Unit display will be on and will show the values selected from the console.
   The following channels will perform as follows:
   - **Channel 2** (start address + 1)– **TURBO**
     fader at 0% Turbo Off
     fader at 100% Turbo On
     Maximum light output at any colour temperature
   - **Canal 3** (start address + 2)– **COLOUR TEMPERATURE**
   - **Canal 4** (start address + 3)– **DIMMER**
   - **Canal 5** (start address + 4)– **GREEN/MAGENTA BIAS correction**
     fader at 50% standard position (green/magenta at 0)
     fader at 25% - 1/8 Green
     fader at 0% - 1/4 Green
     fader at 75% +1/8 Green
     fader at 100% +1/8 Green

2. **INDIVIDUAL Mode** (channel 1 fader at 100%)
   The VAC Control Unit display will be off.
   The Individual mode lets you bypass the THELIGHT software to freely control any of the three LEDs: Warm White, White and Green.
   The following channels will perform as follows:
   - **Channel 2** (start address + 1) – **WARM WHITE**
   - **Channel 3** (start address + 2) – **WHITE**
   - **Channel 4** (start address + 3) – **GREEN**
   - **Channel 5** – no use

7. MECHANICAL ADJUSTMENTS

Beam angle variation

Hold the lamp head from the outer rods and bend it in or out to the wanted concave or convex shape.
Choose the light beam angle you need and the lamp head will remain at the chosen setting.
When the lamp head is positioned at standard flat setting the light beam angle is 35°.
The maximum light beam angle is given when the lamp head is bend at its more convex setting.

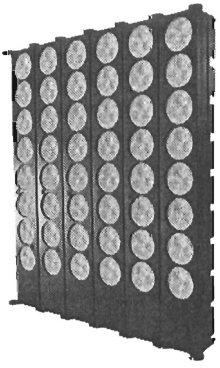

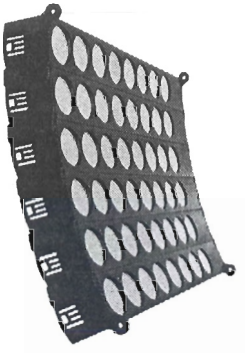

Barn doors installation

Insert the barn door pin end into the hole located in the external lamp head bar as shown in the picture.
The right mounting position is achieved when the product name is visible facing outwards.

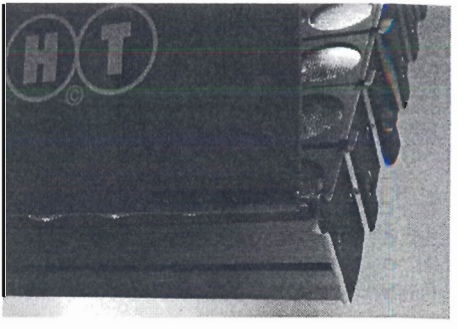

Align the other barn door end with the opposite hole in the lamp head exterior bar, insert the knob in his housing and tighten it as shown in the picture.
Adjust the barn doors friction by tightening the knob.

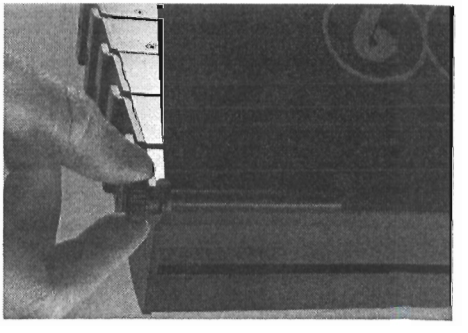

⚠	Warning	If there is too much friction on the barn doors or they even become stuck do not force them since they might get damage. Just lightly loosen the knobs to release the barn doors and tighten the knobs again to get the wished friction.

Quick link diffuser installation

To assemble the diffuser insert the four magnets in their respective holes to set-up a diffusion box as shown in the picture.

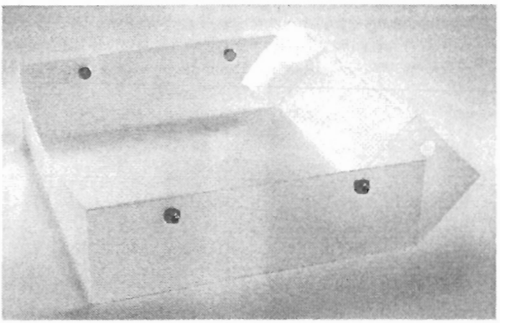

Position the lamp head in its standard flat setting.
Align the top diffuser box magnets with their respective screws located on the lamp head.
Do the same thing with the low magnets and their power will automatically fix the diffuser to the lamp head.

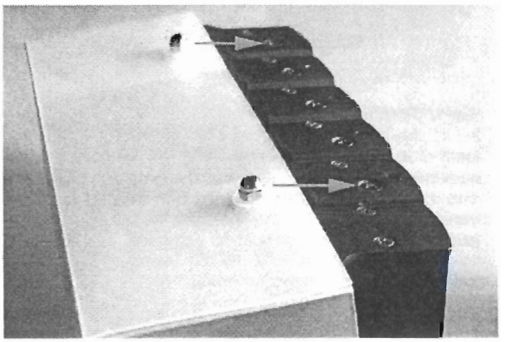

NOTE:	The diffuser softens and broadens the light beam, yet retains general beam shape with minimal colour temperature shift. Excellent for softening harsh edges. The transmission lost is 2/3 of a stop.

NOTE:	The diffuser has been designed so that when installed allows the lamp head to bend and focus the beam angle.

8. SPECIFICATIONS

6LIGHT

COLOUR TEMPERATURE	adjustable from 2800K a 8500K (with 100K increments)
LIGHT INTENSITY	dimmable with no colour deviation (increments of 1/2 stop)
GREEN/MAGENTA BIAS	adjustable +/- 1/4 y 1/8 steps
CRI	90 from 2900K a 6500K
DIMENSIONS	339 x 302 x 71 mm
WEIGHT	3,5 kg
POWER DRAW	140W 30V (maximum 165W)
BEAM ANGLE	variable from 30º to 85º (standard 35º)
LED RATED LIFE	more than 50.000 hours
THELIGHT LED TECHNOLOGY	UME (Minimum Emitting Unit) made up of: 3 high power LED with a selected BIN: Warm white, White, Green + fresnel lens + CPU control with THELIGTH software.
RIGGING OPTIONS	quick link swivel-ball head, adjustable yoke
ACCESSORIES	quick link diffuser box, hexagonal 5/8" (16mm) baby spud,removable barn doors

4LONG

COLOUR TEMPERATURE	adjustable from 2800K a 8500K (with 100K increments)
LIGHT INTENSITY	dimmable with no colour deviation (increments of 1/2 stop)
GREEN/MAGENTA BIAS	adjustable +/- 1/4 y 1/8 steps
CRI	90 from 2900K a 6500K
DIMENSIONS	622 x 207 x 71 mm
WEIGHT	4,4 kg
POWER DRAW	185W 30V (maximum 220W)
BEAM ANGLE	variable from 30º to 65º (standard 35º)
LED RATED LIFE	more than 50.000 hours
THELIGHT LED TECHNOLOGY	UME (Minimum Emitting Unit) made up of: 3 high power LED with a selected BIN: Warm white, White, Green + fresnel lens + CPU control with THELIGTH software.
RIGGING OPTIONS	quick link swivel-ball head, adjustable yoke, adjustable yoke to mount up to four units
ACCESSORIES	quick link diffuser box, hexagonal 5/8" (16mm) baby spud,removable barn doors

Control Unit

DIMENSIONS	334 x 173 x 87 mm
WEIGHT	2,7 kg
POWER SUPPLY	Universal 90-264 VAC
INPUT FREQUENCY	50/60Hz
OUTPUT FREQUENCY	20KHz
FUSE	2 x 2,5 A

CHROMATITY COORDINATES DIAGRAM

[x, y CIE-1931]

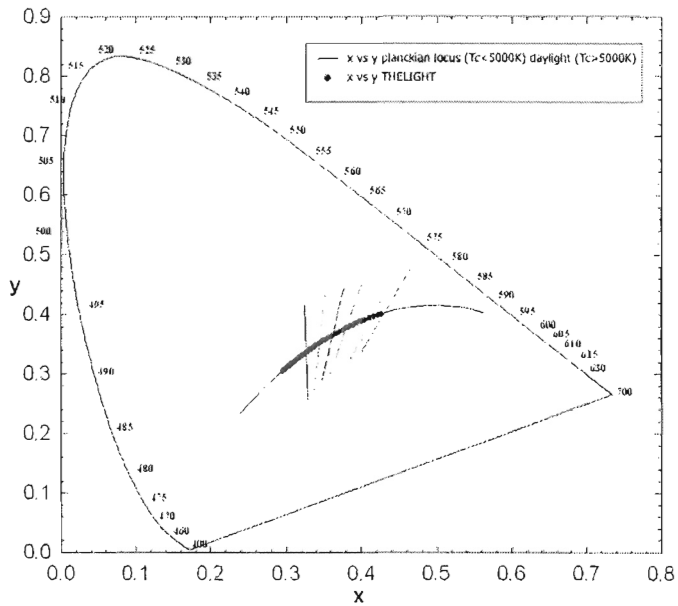

Shown on the diagram are the THELIGHT lamp head chromaticity coordinates (x, y CIE-1931) feed and digitally controlled by its Control Unit and they are compared with the reference illuminants. These reference illuminants are the Planckian locus radiator set below 5000K and the CIE daylight reference is set over 5000K. The Planckian locus radiator references the chromaticity for several tungsten lamps colour temperatures while the daylight locus typify daylight type D illuminants.
The diagram evidence the light emanated by THELIGHT luminary at every colour temperature entirely matches with the described locus reference so that the colour of the light produced is essentially the same as incandescent and daylight. It is also remarkable the minimum green/magenta deviation over the locus reference along the range of colour temperatures (means minimal difference between THELIGHT chromaticity coordinates and the ideal reference line).

CALIBRATION
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has been calibrated according to the United States National Institute of Standards (NIST) and the german Physikalisch-Technische Bundesanstalt (PTB) standard references.

ACCURACY
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has an imprecision over the spectral radiometric results delivered lower than 1%.

PHOTOMETRICS

24 fps / 500 ASA

6LIGHT

5600K				3200K		
Lux	F-Stop	Fc	meters	Fc	F-Stop	Lux
9000	16.7	836	1	632	16.3	6800
1100	5,6.7	102	3	78	5,6.3	840

Readings made with scanning spectrometer at stable temperature, Control Unit set at maximum light intensity (Turbo On and dimmer at 9 setting), lamp head at standard flat setting and measurement instrument positioned perpendicular over the luminary surface center.

CALIBRATION
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has been calibrated according to the United States National Institute of Standards (NIST) and the German Physikalisch-Technische Bundesanstalt (PTB) standard references.

ACCURACY
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has an imprecision over the spectral radiometric results delivered lower than 1%.

Specifications subject to change without notice. THELIGHT technology is protected under Spanish license laws with international patents pending.
THELIGHT luminary for cine and tv, S.L. www.thelight.com.es

24 fps / 500 ASA

4LONG

5600K				3200K		
Lux	F-Stop	Fc	meters	Fc	F-Stop	Lux
10000	22	930	1	650	16.4	7000
1600	8.2	149	3	102	5,6.7	1100

Readings made with scanning spectrometer at stable temperature, Control Unit set at maximum light intensity (Turbo On and dimmer at 9 setting), lamp head at standard flat setting and measurement instrument positioned perpendicular over the luminary surface center.

CALIBRATION
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has been calibrated according to the United States National Institute of Standards (NIST) and the German Physikalisch-Technische Bundesanstalt (PTB) standard references.

ACCURACY
The Instrument Systems scanning spectrometer, model Spectro 320, serial number 30932004, with its accessory TOP-100 has an imprecision over the spectral radiometric results delivered lower than 1%.

Specifications subject to change without notice. THELIGHT technology is protected under Spanish license laws with international patents pending.
THELIGHT luminary for cine and tv, S.L. www.thelight.com.es

REGULATIONS

This equipment is designed to meet the following regulations and safety standards for battery powered technology equipment:

ENVINRONMENTAL

THELIGHT devices are certified and intended for indoor use (lamp head IP21, VDC Control Unit IP41)

LAMP HEAD OPERATIÓN TEMPERATURE	from -20º to +30º C
CONTROL UNIT OPERATIÓN TEMPERATURE	from -20º to +50º C
OPERATING HUMIDITY	from 30 to 90% RH non condensing
FUSE	2 x 2,5 A

telpro CE

Test nº: 2010 - 790 Date: 27 - 9 - 2010

Mark: THELIGHT 2 Models Serial nº:

REPORT

ELECTROMAGNETIC COMPATIBILITY

Test Laboratory, CE mark



TESTS AND MEASURES REQUESTED:

DIRECTIVE:

2004/108/CE Electromagnetic Compatibility (E. M. C.)

STANDARD:

(IEC) EN 61000-6-1:2005 Electromagnetic compatibility. Generic immunity standard. Residential and light industry
(IEC) EN 61000-6-3:2005 Electromagnetic compatibility. Generic EMI standard. Residential and light industry

EN 301489-1 v1.8.1 (2008-02) Radio Electric Spectrum Protection (f = 6 GHz Band)

(IEC) EN 61000-3-2:2001/A2:2006 Harmonic current emissions a. c. Mains.
(IEC) EN 61000-3-3:1997/A2:2006 Voltage fluctuations and Flicker a. c. Mains.

UNE-EN 55015:2007+A1:2008+A2:2009 EMI of electrical lighting and similar equipment (CISPR 15:2005)

telpro CE

Laboratorio de Ensayos, marcado CE

Test Laboratory, CE mark

Marca Mark	THELIGHT
Modelo Model	4LONG high power LED luminary + VAC Control Unit 6LIGHT high power LED luminary + VAC Control Unit
Descripción Description	Luminary for cine and TV
ENSAYOS Y MEDIDAS TESTS AND MESUREMENTS Norma Standard	Seguridad Eléctrica. (Electric Safety) EN 61 000-6-1:2005 EN 61 000-6-3:2005 EN 61000-3-2:2001/A2:2006 EN 61000-3-3:1997/A2:2006 EN 55015:2007+A12008+A2:2009 EN 301489-1 v1.8.1 (2008-02)
Resultado en el informe de los ensayos Nº. Show in summary in test report Nº.	2010-789 2010-790
Verificado Verified	V
Fecha Date	27-9-2010
Sello de la compañía y firma: Company seal and signature F. J. García. Ing. T. Telecom.	TELPRO Av. Ca N'Enric, 39 08197 Sant Cugat - Valldoreix BARCELONA TEL. (93) 5895567 / 608 691 651

WARRANTY

THELIGHT high power LED light equipments are guaranteed to be free from defects in workmanship and parts in a warranty period of one (1) year from the date of purchase. Defects that occur within this warranty period, under normal use and care will be repaired or replaced at THELIGHT discretion, solely at our option with no charge for parts or labor.
In the event of the equipment malfunction, contact the dealer from which you purchased the product. Please note that you will be not be reimbursed for the cost of bringing the equipment to the THELIGHT Repair Center.
THELIGHT reserves the right to replace the product or relevant part with the same or equivalent product or part, rather than repair it. Where a replacement is provided the products or part replaced becomes the property of THELIGHT. THELIGHT may replace parts with refurbished parts. Replacement of the product or a part does not extend or restart the Warranty period.

Returns or exchanges from the customers will be accepted within 15 days of delivery and will not include the actual shipping costs. Item(s) must be in original packaging and condition, must not be assembled, and must include its original user manual.

This warranty does not cover any damage resulting from:

- Failure to follow the instructions in the instruction manual;
- Repair, modification or overhaul not conducted by any authorized THELIGHT personnel.
- Fire, natural disaster, act of God, lightning, abnormal voltage, etc;
- Submergence in water (flooding), exposure to alcohol or other beverages, infiltration of sand or mud, physical shock, or dropping of the equipment and other unnatural causes.

This warranty only applies to the lamp head and the Control Unit and not to the accessories, such as the diffuser or barn doors, nor does it apply to the fuses and other consumables provided.

Any consequential damages arising from failure of the equipment, such as expenses incurred in taking pictures or recording images or loss of expected profit, will not be reimbursed whether they occur during the warranty period or not.
Parts essential to the servicing of the light equipment (that is, components required to maintain the functions and quality of the fixture) will be available for a period of five years after the product is discontinued.

THELIGHT Luminary for cine and tv, S.L.
www.thelight.com.es

The total or partial reproduction of this guide is prohibited without the express written permission of THELIGHT.
THELIGHT technology is protected under Spanish license laws with international patents pending.
Information and specifications in this document are subject to change without notice.
2011 © Copyright THELIGHT. All rights reserved.

THELIGHT Luminary for cine and TV, S.L.

2011 © Copyright THELIGHT. All rights reserved.